

- Quick mounting.
- No condensation
- Quick and simple maintenance
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.
- Extra Slim(76mm) - High Power.

Models	Voltage Frequency	Version (V)	Compliance	Certification on demand
MKP1111TEI	1~ 230V 50/60Hz	1 + I	CE	
MKP1111REI	2~ 400V 50/60Hz	1 + I	CE	
MKP1116TEI	1~ 230V 50/60Hz	6 + I	CE	

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

Versions:

(V) 1 = Electromechanical thermostat + alarm signal.

(V) 2 = Electromechanical thermostat + alarm signal + door open checking device.

(V) 3 = Electronic thermostat + display + alarm signal + door open checking device.

(V) 4 = Electronic thermostat + display + alarm signal.



(V) 6 = Electromechanical thermostat + alarm signal + remote control.

(V) I = Recessed mounting.

Available accessories	Filter kit	See reference sheet
	Spare filter set	See reference sheet
	Dissipator of condensation	



Operating voltage ±10%	Voltage	I rated 50/60 Hz	I start-up 50/60 Hz	Protection fuse	MCA
	1~ 230V	3,8/4,0 A	14,8/17 A	T6 A	
	2~ 400V	2,2/2,3 A	8,5/10,5 A	T6 A	

Technical data		Frequency 50/60 Hz	
Cooling power	A35-A35	1,1 / 1,2 kW	[3754 / 4095 Btu/h]
	A50-A35	0,85 / 0,9 kW	[2900 / 3071 Btu/h]
Absorbed electrical power	A35-A35	0,87 / 0,92 kW	
	A50-A35	0,99 / 1,1 kW	
Energy efficieny EER	A35-A35	1,3 / 1,3	
Fan flow rate	ext. cabinet	860 / 900 m3/h	
	int. cabinet	570 / 620 m3/h	
Cooling gas	R134a		
Max pressure	2,4 MPa		[348 psi]
Temperature range: setting 35°C [95 F]	ext. cabinet	20÷55 / 20÷50 °C	[68÷131 / 68÷122 F]
	int. cabinet	20÷50 / 20÷45 °C	[68÷122 / 68÷113 F]
Noise level	67 dB(A)		
Weight	42 kg		[92,6 lb]
Continuous duty	100%		
Protection standard	ext. Cabinet	IP 34	
	int. cabinet	IP 55	
Standard colour	Embossed	RAL 7035	
Power connection	Connector		
Dimensions	W x H x D	495x1640x162 mm	[19,49x64,57x6,38 in]
Installation environment	Indoor		

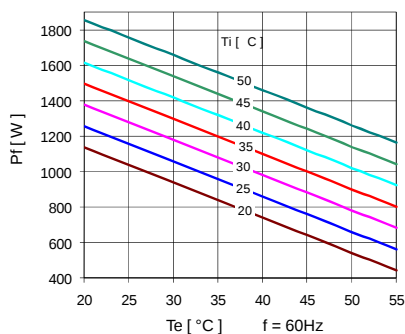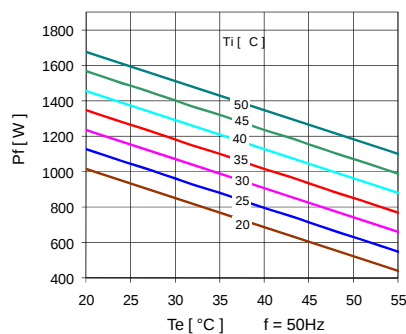

WALL MOUNTED MODEL

1100 W

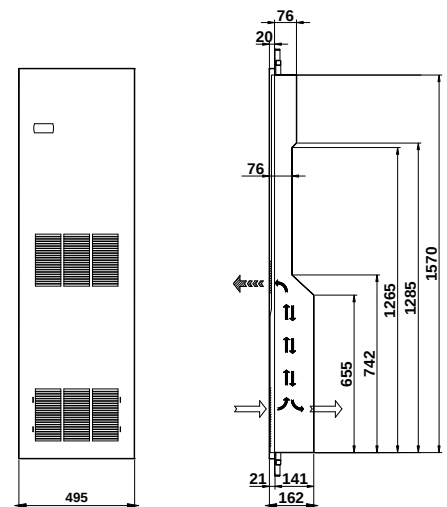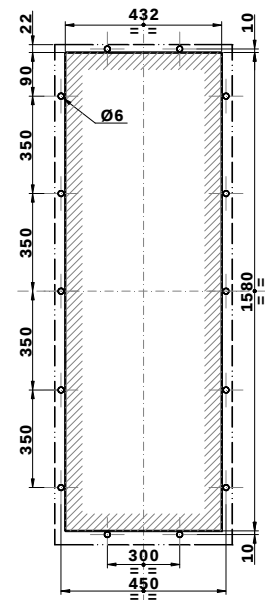

- Quick mounting.
- Totally external mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Version (V)	Compliance	Certification on demand
MKP (11-27) 17T*\$	7	CE	cURus
MKP (11-27) 17P*\$	7	CE	cURus
MKP (11-27) 17C*\$	7	CE	cURus

FOR THECNICAL DATA SEE DATA SHEETS OF DIFFERENT MODEL.

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.


(\$*) E = Total External mounting.

(*) H = not cURus certified

(*) U = cURus certified


Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

EXTERNAL MOUNTING - E -

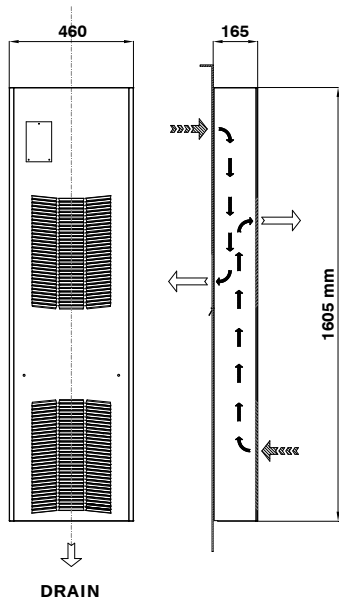

RECESSED MOUNTING

- O - Outside
- S - Semi
- I - Inside

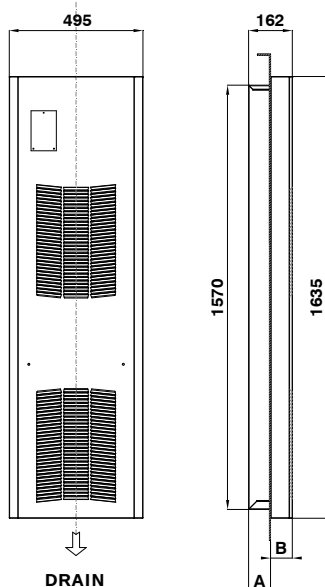


Version =	O	S	I
A (INside enclosure)	29	81	141
B (OUTside enclosure)	133	81	21

WALL MOUNTED MODEL

TOTAL EXTERNAL



CUT-OUT FOR EXTERNAL MOUNTING - E -

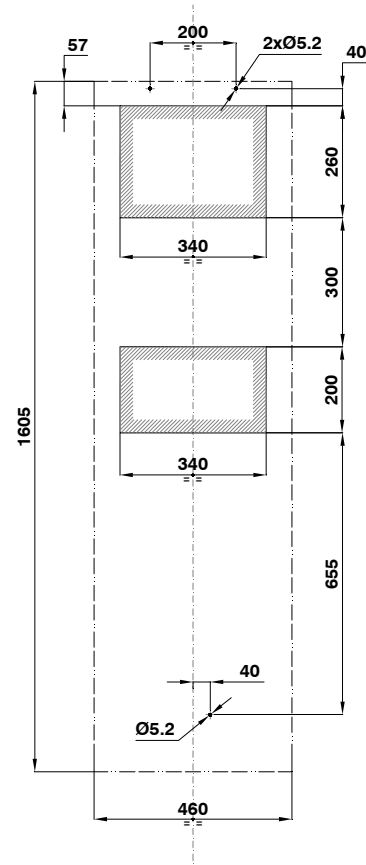

1 mm = 0.03937 "
1 " = 25.4 mm

- Quick mounting.
- Semi-recessed and recessed mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Voltage Frequency	Version (V)	Compliance	Certification on demand
MKP2717T*\$	1~ 230V 50/60Hz	7	CE	cURus

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.
 V) 7 = Electronic thermostat + alarm signal + door open checking device.

(S) I = Recessed mounting.

(S) S = Semi-recessed mounting.

(S) O = External mounting.


(*) H = not cURus certified.

(*) U = cURus certified.

Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

Operating voltage ±10%	Voltage	I rated 50/60 Hz	I start-up 50/60 Hz	Protection fuse	MCA
	1~ 230V	6,4/7,4 A	24,2/28,2 A	T16 A	9,7 A

Technical data		Frequency 50/60 Hz	
Cooling power	A35-A35	2,7 / 2,9 kW	[9213 / 9895 Btu/h]
	A50-A35	2,2 / 2,4 kW	[7507 / 8189 Btu/h]
Absorbed electrical power	A35-A35	1,2 / 1,4 kW	
	A50-A35	1,4 / 1,7 kW	
Energy efficiency EER	A35-A35	2,3 / 2,1	
Fan flow rate	ext. cabinet	1200 / 1340 m3/h	
	int. cabinet	885 / 990 m3/h	
Cooling gas		R134a	
Max pressure		2,4 MPa	[348 psi]
Temperature range: setting 35°C [95 F]	ext. cabinet	20 ÷ 55 °C	[68 ÷ 131 F]
	int. cabinet	20 ÷ 50 °C	[68 ÷ 122 F]
Noise level		69 dB(A)	
Weight		57 kg	[125,7 lb]
Continuous duty		100%	
Protection standard	ext. Cabinet	IP 34	
	int. cabinet	IP 55	
Standard colour	Embossed	RAL 7035	
Power connection		Connector	
Dimensions Recessed / Semi-recessed and External mounting	W x H x D	495x1640x162 mm	[19,49x64,57x6,38 in]
Installation environment		Indoor	


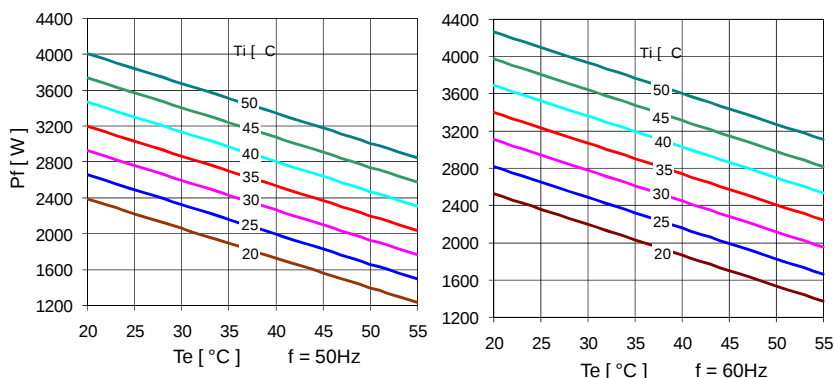


WALL MOUNTED MODEL

2700 W



TEMPLATE FOR RECESSED / SEMI-RECESSED AND EXTERNAL MOUNTING

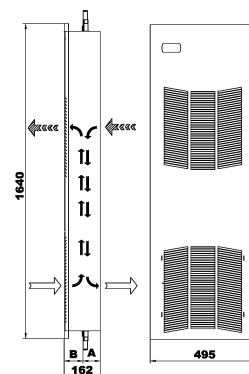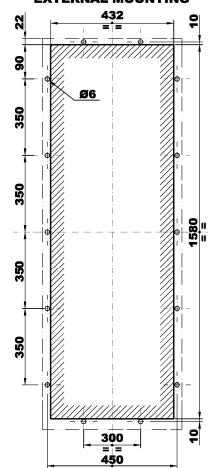

Version =	O	S	I
A(Inside enclosure) =	29 mm	81	141
B(Outside enclosure) =	133 mm	81	21



- Quick mounting.
- Semi-recessed and recessed mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Voltage Frequency	Version (V)	Compliance	Certification on demand
MKP2717C*\$	3~ 400V 50 Hz 3~ 460V 60 Hz	7	CE	cURus

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.
V) 7 = Electronic thermostat + alarm signal + door open checking device.

(\$) I = Recessed mounting

(\$) S = Semi-recessed mounting.

(\$) O = External mounting.



(*) H = not cURus certified

(*) U = cURus certified

Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

Operating voltage ±10%	Voltage	I rated	I start-up	Protection	MCA
	3~ 400V 50 Hz	3 A	9 A	T8 A	
	3~ 460V 60 Hz	3,5 A	10,6 A	T8 A	4,8 A

Technical data		Frequency 50/60 Hz	
Cooling power	A35-A35	2,7 / 2,9 kW	[9213 / 9895 Btu/h]
	A50-A35	2,2 / 2,4 kW	[7507 / 8189 Btu/h]
Absorbed electrical power	A35-A35	1,7 / 2,0 kW	
	A50-A35	2,0 / 2,3 kW	
Energy efficiency EER	A35-A35	1,6 / 1,5	
Fan flow rate	ext. cabinet	1200 / 1340 m3/h	
	int. cabinet	885 / 990 m3/h	
Cooling gas		R134a	
Max pressure		2,4 MPa	[348 psi]
Temperature range: setting 35°C [95 F]	ext. cabinet	20 ÷ 55 °C	[68 ÷ 131 F]
	int. cabinet	20 ÷ 50 °C	[68 ÷ 122 F]
Noise level		69 dB(A)	
Weight		60 kg	[132,2 lb]
Continuous duty		100%	
Protection standard	ext. Cabinet	IP 34	
	int. cabinet	IP 55	
Standard colour	Embossed	RAL 7035	
Power connection		Connector	
Dimensions Recessed / Semi-recessed and External mounting	W x H x D	495x1640x162 mm	[19,49x64,57x6,38 in]
Installation environment		Indoor	

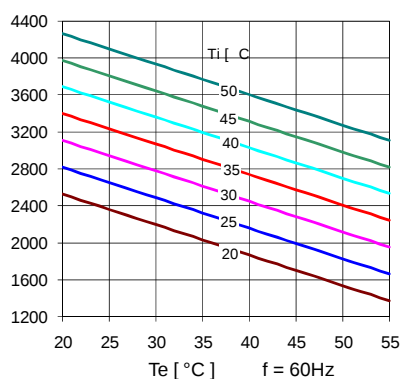
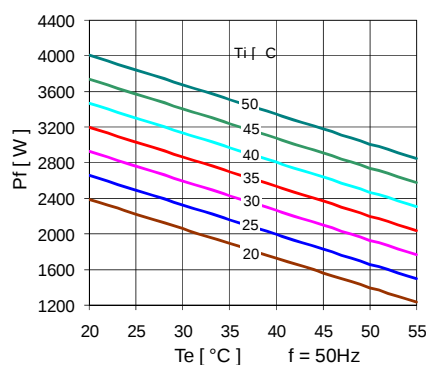


WALL MOUNTED MODEL

2700 W



TEMPLATE FOR RECESSED / SEMI-RECESSED AND EXTERNAL MOUNTING

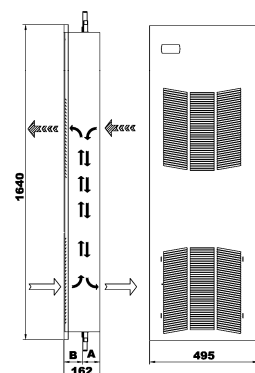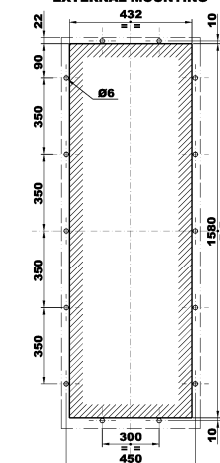

Version =	O	S	I
A(Inside enclosure) =	29 mm	81	141
B(Outside enclosure) =	133 mm	81	21



- Quick mounting.
- Semi-recessed and recessed mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Voltage Frequency	Version (V)	Compliance	Certification on demand
MKP2717T*\$	1~ 230V 50/60Hz	7	CE	cURus

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.
 V) 7 = Electronic thermostat + alarm signal + door open checking device.

(\$) I = Recessed mounting.

(\$) S = Semi-recessed mounting.

(\$) O = External mounting.


(*) H = not cURus certified.

(*) U = cURus certified.

Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

Operating voltage ±10%	Voltage	I rated 50/60 Hz	I start-up 50/60 Hz	Protection fuse	MCA
	1~ 230V	6,4/7,4 A	24,2/28,2 A	T16 A	9,7 A

Technical data		Frequency 50/60 Hz	
Cooling power	A35-A35	2,7 / 2,9 kW	[9213 / 9895 Btu/h]
	A50-A35	2,2 / 2,4 kW	[7507 / 8189 Btu/h]
Absorbed electrical power	A35-A35	1,2 / 1,4 kW	
	A50-A35	1,4 / 1,7 kW	
Energy efficiency EER	A35-A35	2,3 / 2,1	
Fan flow rate	ext. cabinet	1200 / 1340 m3/h	
	int. cabinet	885 / 990 m3/h	
Cooling gas		R134a	
Max pressure		2,4 MPa	[348 psi]
Temperature range: setting 35°C [95 F]	ext. cabinet	20 ÷ 55 °C	[68 ÷ 131 F]
	int. cabinet	20 ÷ 50 °C	[68 ÷ 122 F]
Noise level		69 dB(A)	
Weight		57 kg	[125,7 lb]
Continuous duty		100%	
Protection standard	ext. Cabinet	IP 34	
	int. cabinet	IP 55	
Standard colour	Embossed	RAL 7035	
Power connection		Connector	
Dimensions Recessed / Semi-recessed and External mounting	W x H x D	495x1640x162 mm	[19,49x64,57x6,38 in]
Installation environment		Indoor	


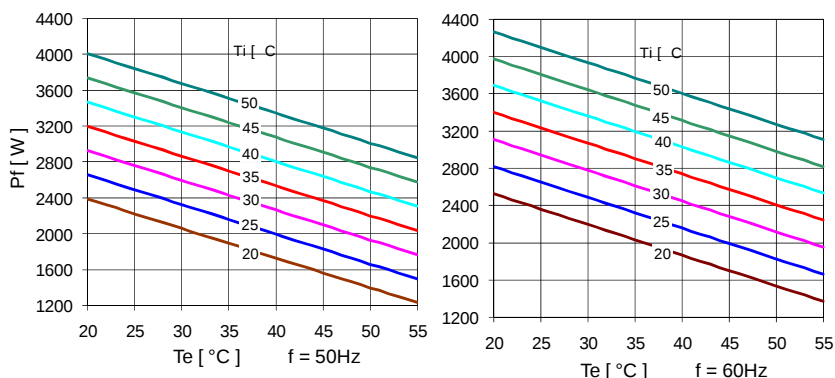


WALL MOUNTED MODEL

2700 W



TEMPLATE FOR RECESSED / SEMI-RECESSED AND EXTERNAL MOUNTING

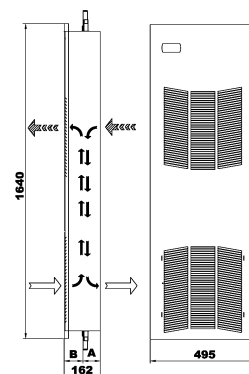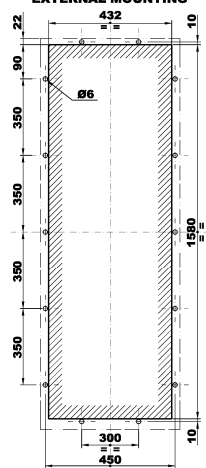

Version =	O	S	I
A(Inside enclosure) =	29 mm	81	141
B(Outside enclosure) =	133 mm	81	21



- Quick mounting.
- Totally external mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Version (V)	Compliance	Certification on demand
MKP (11-27) 17T*\$	7	CE	cURus
MKP (11-27) 17P*\$	7	CE	cURus
MKP (11-27) 17C*\$	7	CE	cURus

FOR THECNICAL DATA SEE DATA SHEETS OF DIFFERENT MODEL.

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.


(\$*) E = Total External mounting.

(*) H = not cURus certified

(*) U = cURus certified


Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

EXTERNAL MOUNTING - E -

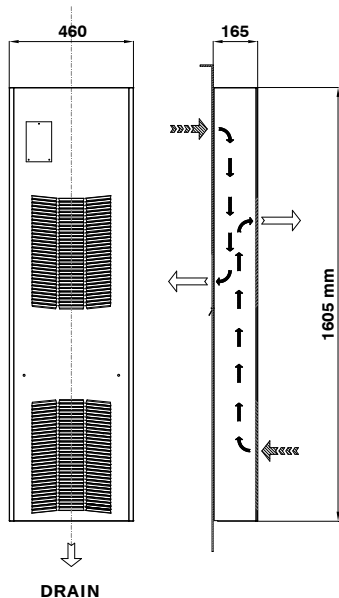

RECESSED MOUNTING

- O - Outside
- S - Semi
- I - Inside

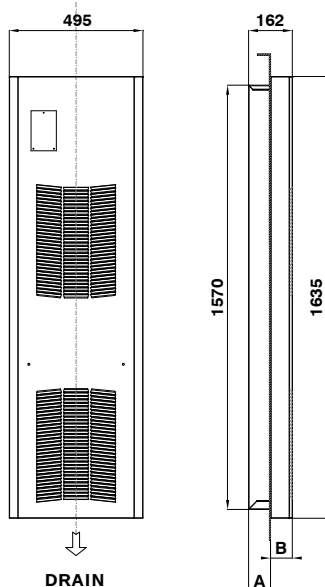


Version =	O	S	I
A (INside enclosure)	29	81	141
B (OUTside enclosure)	133	81	21

WALL MOUNTED MODEL

TOTAL EXTERNAL



CUT-OUT FOR EXTERNAL MOUNTING - E -

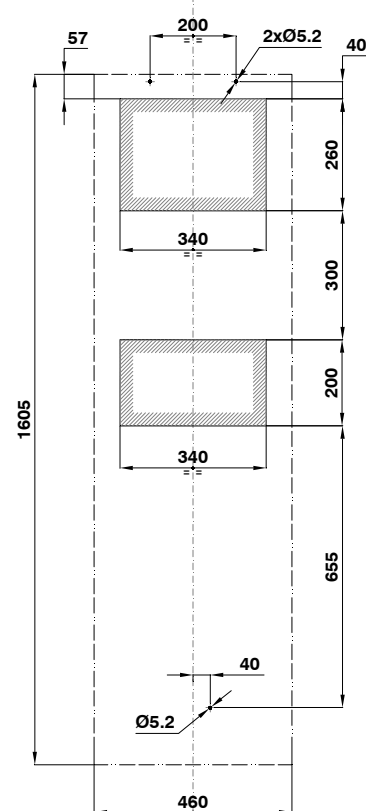

1 mm = 0.03937 "
1 " = 25.4 mm

- Quick mounting.
- Semi-recessed and recessed mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Voltage Frequency	Version (V)	Compliance	Certification on demand
MKP2017C*\$	3~ 400V 50 Hz 3~ 460V 60 Hz	7	CE	cURus

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.

(\$ I = Recessed mounting.

(\$ S = Semi-recessed mounting.

(\$ O = External mounting.


(*) H = not cURus certified

(*) U = cURus certified

Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

Operating voltage ±10%	Voltage	I rated	I start-up	Protection fuse	MCA
	3~ 400V 50 Hz	2,6 A	7,9 A	T8 A	
	3~ 460V 60 Hz	3,2 A	9,5 A	T8 A	4,5 A

Technical data		Frequency 50/60 Hz	
Cooling power	A35-A35	2,2 / 2,4 kW	[7507 / 8189 Btu/h]
	A50-A35	1,8 / 2,0 kW	[6142 / 6824 Btu/h]
Absorbed electrical power	A35-A35	1,5 / 1,8 kW	
	A50-A35	1,8 / 2,1 kW	
Energy efficiency EER	A35-A35	1,5 / 1,3	
Fan flow rate	ext. cabinet	885 / 990 m3/h	
	int. cabinet	885 / 990 m3/h	
Cooling gas		R134a	
Max pressure		2,4 MPa	[348 psi]
Temperature range: setting 35°C [95 F]	ext. cabinet	20 ÷ 55 °C	[68 ÷ 131 F]
	int. cabinet	20 ÷ 50 °C	[68 ÷ 122 F]
Noise level		69 dB(A)	
Weight		54 kg	[119 lb]
Continuous duty		100%	
Protection standard	ext. Cabinet	IP 34	
	int. cabinet	IP 55	
Standard colour	Embossed	RAL 7035	
Power connection		Connector	
Dimensions Recessed / Semi-recessed and External mounting	W x H x D	495x1640x162 mm	[19,49x64,57x6,38 in]
Installation environment		Indoor	


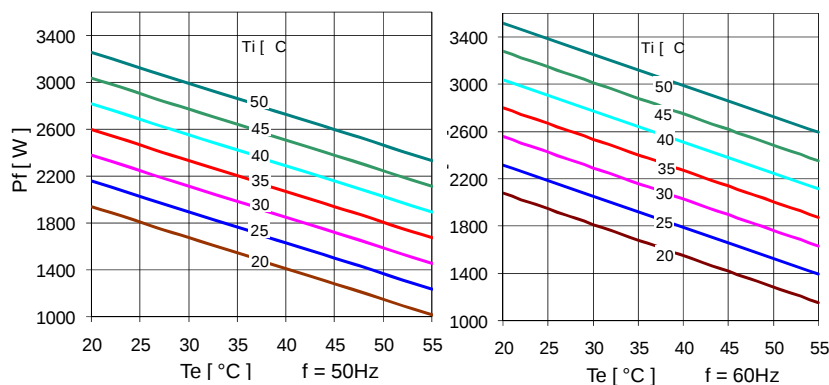


WALL MOUNTED MODEL

2200 W



TEMPLATE FOR RECESSED / SEMI-RECESSED AND EXTERNAL MOUNTING

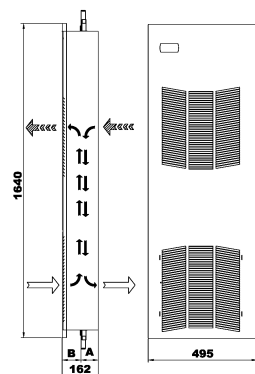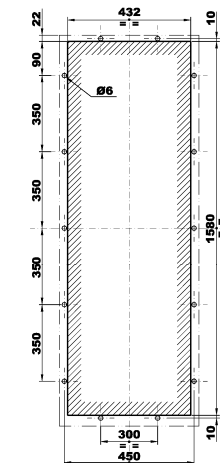

Version =	O	S	I
A(Inside enclosure) =	29 mm	81	141
B(Outside enclosure) =	133 mm	81	21



- Quick mounting.
- Totally external mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Version (V)	Compliance	Certification on demand
MKP (11-27) 17T*\$	7	CE	cURus
MKP (11-27) 17P*\$	7	CE	cURus
MKP (11-27) 17C*\$	7	CE	cURus

FOR THECNICAL DATA SEE DATA SHEETS OF DIFFERENT MODEL.

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.


(\$*) E = Total External mounting.

(*) H = not cURus certified

(*) U = cURus certified


Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

EXTERNAL MOUNTING - E -

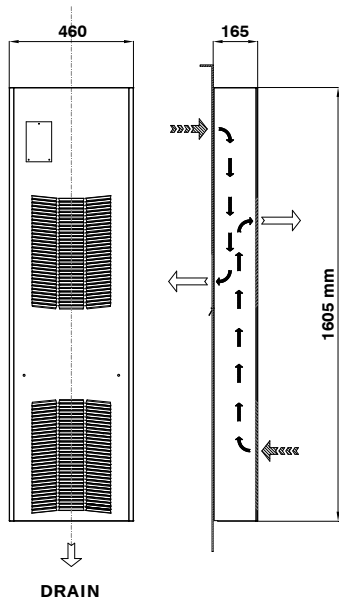

RECESSED MOUNTING

- O - Outside
- S - Semi
- I - Inside

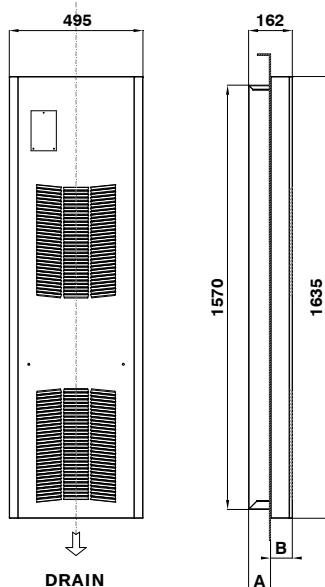


Version =	O	S	I
A (INside enclosure)	29	81	141
B (OUTside enclosure)	133	81	21

WALL MOUNTED MODEL

TOTAL EXTERNAL



CUT-OUT FOR EXTERNAL MOUNTING - E -

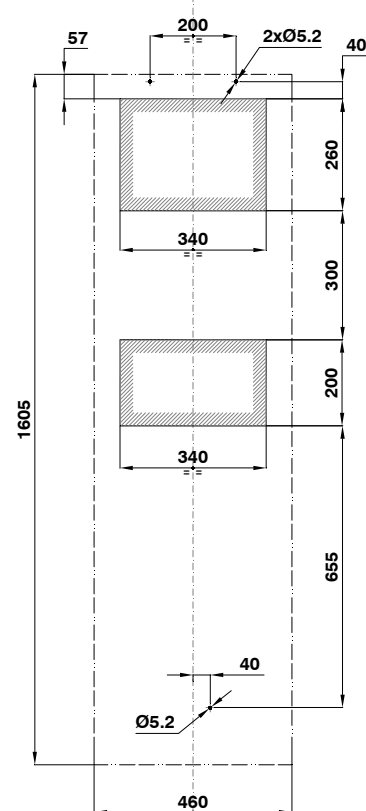

1 mm = 0.03937 "
1 " = 25.4 mm



- Quick mounting.
- Semi-recessed and recessed mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Voltage Frequency	Version (V)	Compliance	Certification on demand
MKP2017T*\$	1~ 230V 50/60Hz	7	CE	cURus
MKP2017P*\$	1~ 115V 50/60Hz	7	CE	cURus

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.

(\$ I = Recessed mounting.

(\$ S = Semi-recessed mounting.

(\$ O = External mounting.


(*) H = not cURus certified.

(*) U = cURus certified.

Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

Operating voltage ±10%	Voltage	I rated 50/60 Hz	I start-up 50/60 Hz	Protection fuse	MCA
	1~ 230V	5,8/6,9 A	22,2/26,2 A	T16 A	9,1 A
	1~ 115V	11,6/13,8 A	44,4/52,4 A	T25 A	18,2 A

Technical data		Frequency 50/60 Hz	
Cooling power	A35-A35	2,2 / 2,4 kW	[7507 / 8189 Btu/h]
	A50-A35	1,8 / 2,0 kW	[6142 / 6824 Btu/h]
Absorbed electrical power	A35-A35	1,1 / 1,3 kW	
	A50-A35	1,3 / 1,5 kW	
Energy efficiency EER	A35-A35	2,0 / 1,8	
Fan flow rate	ext. cabinet	885 / 990 m3/h	
	int. cabinet	885 / 990 m3/h	
Cooling gas		R134a	
Max pressure		2,4 MPa	[348 psi]
Temperature range: setting 35°C [95 F]	ext. cabinet	20 ÷ 55 °C	[68 ÷ 131 F]
	int. cabinet	20 ÷ 50 °C	[68 ÷ 122 F]
Noise level		67 dB(A)	
Weight		50 kg	[110,2 lb]
Continuous duty		100%	
Protection standard	ext. Cabinet	IP 34	
	int. cabinet	IP 55	
Standard colour	Embossed	RAL 7035	
Power connection		Connector	
Dimensions Recessed / Semi-recessed and External mounting	W x H x D	495x1640x162 mm	[19,49x64,57x6,38 in]
Installation environment		Indoor	


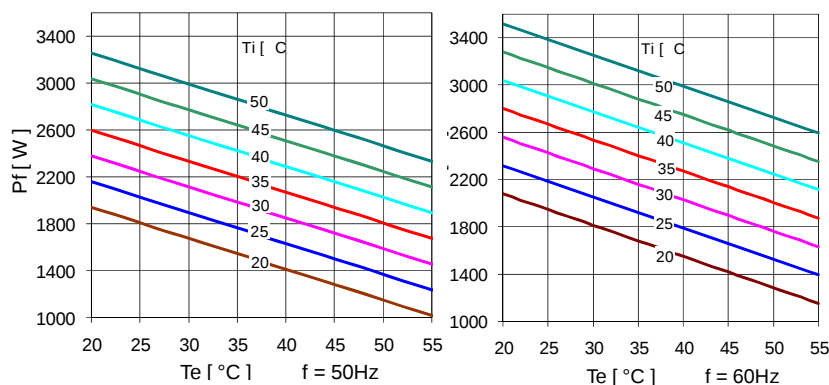


WALL MOUNTED MODEL

2200 W



TEMPLATE FOR RECESSED / SEMI-RECESSED AND EXTERNAL MOUNTING

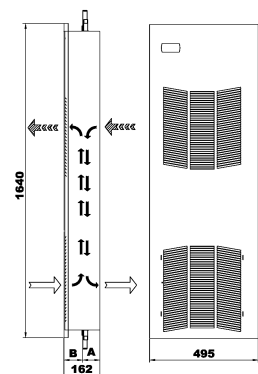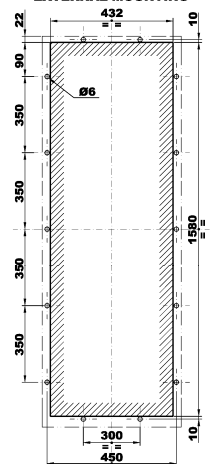

Version =	O	S	I
A(Inside enclosure) =	29 mm	81	141
B(Outside enclosure) =	133 mm	81	21



- Quick mounting.
- Semi-recessed and recessed mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Voltage Frequency	Version (V)	Compliance	Certification on demand
MKP2017C*\$	3~400V 50 Hz 3~460V 60 Hz	7	CE	cURus

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.

(\$) I = Recessed mounting.

(S) S = Semi-recessed mounting.

(\\$) O = External mounting.


(*) $H = \text{not cURus certified}$

(*) $U = cURus$ certified

Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

Operating voltage ±10%	Voltage	I rated	I start-up	Protection fuse	MCA
	3~ 400V 50 Hz	2,6 A	7,9 A	T8 A	
	3~ 460V 60 Hz	3,2 A	9,5 A	T8 A	4,5 A

Technical data		Frequency 50/60 Hz	
Cooling power	A35-A35	2,2 / 2,4 kW	[7507 / 8189 Btu/h]
	A50-A35	1,8 / 2,0 kW	[6142 / 6824 Btu/h]
Absorbed electrical power	A35-A35	1,5 / 1,8 kW	
	A50-A35	1,8 / 2,1 kW	
Energy efficiency EER	A35-A35	1,5 / 1,3	
Fan flow rate	ext. cabinet	885 / 990 m3/h	
	int. cabinet	885 / 990 m3/h	
Cooling gas		R134a	
Max pressure		2,4 MPa	[348 psi]
Temperature range: setting 35°C [95 F]	ext. cabinet	20 ÷ 55 °C	[68 ÷ 131 F]
	int. cabinet	20 ÷ 50 °C	[68 ÷ 122 F]
Noise level		69 dB(A)	
Weight		54 kg	[119 lb]
Continuous duty		100%	
Protection standard	ext. Cabinet	IP 34	
	int. cabinet	IP 55	
Standard colour	Embossed	RAL 7035	
Power connection		Connector	
Dimensions Recessed / Semi-recessed and External mounting	W x H x D	495x1640x162 mm	[19,49x64,57x6,38 in]
Installation environment		Indoor	


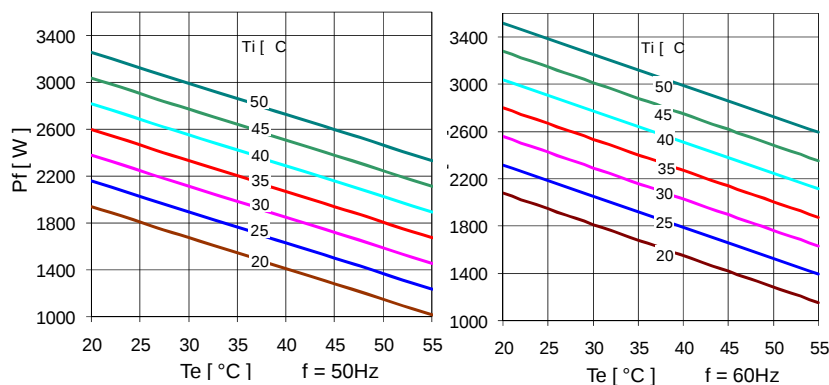


WALL MOUNTED MODEL

2200 W



**TEMPLATE FOR RECESSED /
SEMI-RECESSED AND
EXTERNAL MOUNTING**

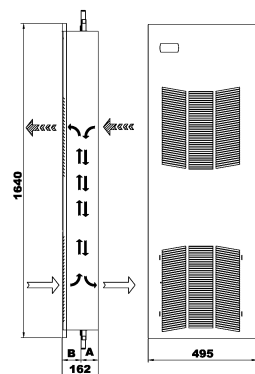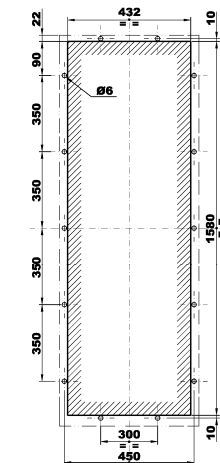

Version =	O	S	I
A(Inside enclosure) =	29 mm	81	141
B(Outside enclosure) =	133 mm	81	21



- Quick mounting.
- Semi-recessed and recessed mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Voltage Frequency	Version (V)	Compliance	Certification on demand
MKP2017T*\$	1~ 230V 50/60Hz	7	CE	cURus
MKP2017P*\$	1~ 115V 50/60Hz	7	CE	cURus

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.

(\$ I = Recessed mounting.

(\$ S = Semi-recessed mounting.

(\$ O = External mounting.


(*) H = not cURus certified.

(*) U = cURus certified.

Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

Operating voltage ±10%	Voltage	I rated 50/60 Hz	I start-up 50/60 Hz	Protection fuse	MCA
	1~ 230V	5,8/6,9 A	22,2/26,2 A	T16 A	9,1 A
	1~ 115V	11,6/13,8 A	44,4/52,4 A	T25 A	18,2 A

Technical data		Frequency 50/60 Hz	
Cooling power	A35-A35	2,2 / 2,4 kW	[7507 / 8189 Btu/h]
	A50-A35	1,8 / 2,0 kW	[6142 / 6824 Btu/h]
Absorbed electrical power	A35-A35	1,1 / 1,3 kW	
	A50-A35	1,3 / 1,5 kW	
Energy efficiency EER	A35-A35	2,0 / 1,8	
Fan flow rate	ext. cabinet	885 / 990 m3/h	
	int. cabinet	885 / 990 m3/h	
Cooling gas		R134a	
Max pressure		2,4 MPa	[348 psi]
Temperature range: setting 35°C [95 F]	ext. cabinet	20 ÷ 55 °C	[68 ÷ 131 F]
	int. cabinet	20 ÷ 50 °C	[68 ÷ 122 F]
Noise level		67 dB(A)	
Weight		50 kg	[110,2 lb]
Continuous duty		100%	
Protection standard	ext. Cabinet	IP 34	
	int. cabinet	IP 55	
Standard colour	Embossed	RAL 7035	
Power connection		Connector	
Dimensions Recessed / Semi-recessed and External mounting	W x H x D	495x1640x162 mm	[19,49x64,57x6,38 in]
Installation environment		Indoor	


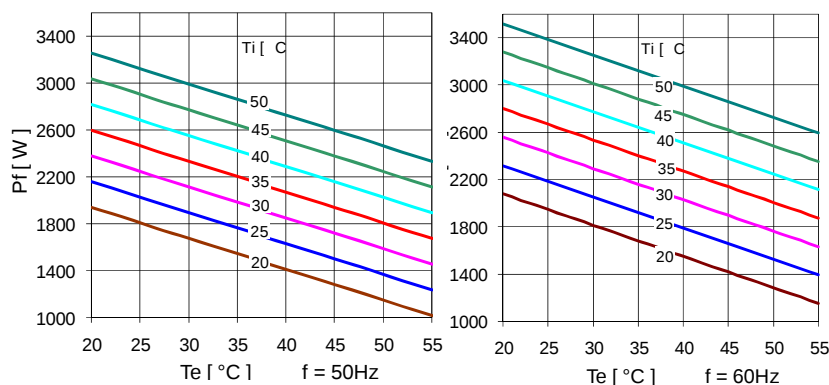


WALL MOUNTED MODEL

2200 W



TEMPLATE FOR RECESSED / SEMI-RECESSED AND EXTERNAL MOUNTING

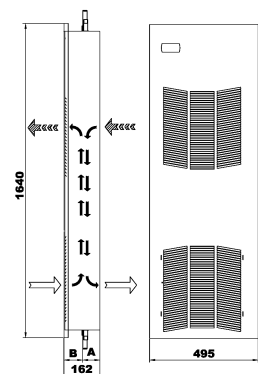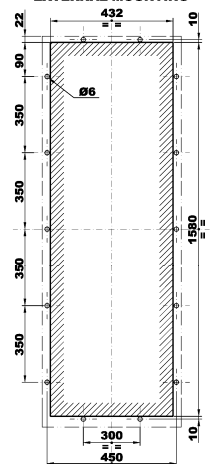

Version =	O	S	I
A(Inside enclosure) =	29 mm	81	141
B(Outside enclosure) =	133 mm	81	21



- Quick mounting.
- Totally external mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Version (V)	Compliance	Certification on demand
MKP (11-27) 17T*\$	7	CE	cURus
MKP (11-27) 17P*\$	7	CE	cURus
MKP (11-27) 17C*\$	7	CE	cURus

FOR THECNICAL DATA SEE DATA SHEETS OF DIFFERENT MODEL.

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.


(\$*) E = Total External mounting.

(*) H = not cURus certified

(*) U = cURus certified


Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

EXTERNAL MOUNTING - E -

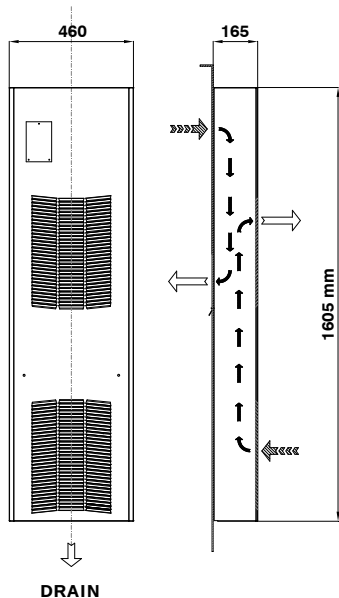

RECESSED MOUNTING

- O - Outside
- S - Semi
- I - Inside

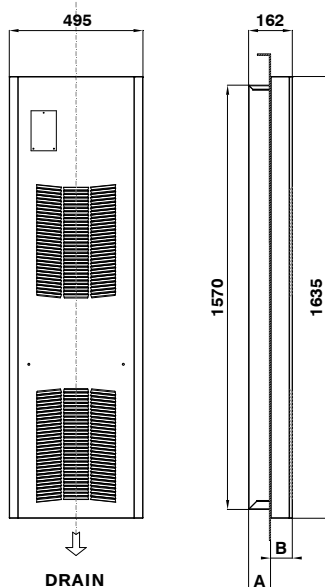


Version =	O	S	I
A (INside enclosure)	29	81	141
B (OUTside enclosure)	133	81	21

WALL MOUNTED MODEL

TOTAL EXTERNAL



CUT-OUT FOR EXTERNAL MOUNTING - E -

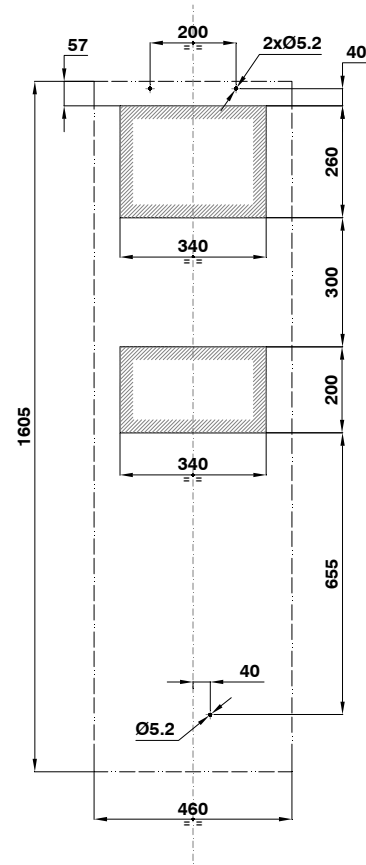

1 mm = 0.03937 "
1 " = 25.4 mm

- Quick mounting.
- Semi-recessed and recessed mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.


Models	Voltage Frequency	Version (V)	Compliance	Certification on demand
MKP1517C*\$	3~ 400V 50Hz 3~ 460V 60Hz	7	CE	cURus

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.
 (V) 7 = Electronic thermostat + alarm signal + door open checking device.
 (\$) I = Recessed mounting.
 (\$) S = Semi-recessed mounting.
 (\$) O = External mounting.
 (*) H = not cURus certified
 (*) U = cURus certified

Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

Operating voltage ±10%	Voltage	I rated	I start-up	Protection fuse	MCA
	3~ 400V 50Hz	2,4 A	7,2 A	T8 A	
	3~ 460V 60Hz	3,0 A	9,0 A	T8 A	4,2 A

Technical data		Frequency 50/60 Hz	
Cooling power	A35-A35	1,5 / 1,6 kW	[5118 / 5459 Btu/h]
	A50-A35	1,2 / 1,3 kW	[4094 / 4435 Btu/h]
Absorbed electrical power	A35-A35	1,3 / 1,5 kW	
	A50-A35	1,5 / 1,8 kW	
Energy efficiency EER	A35-A35	1,2 / 1,1	
Fan flow rate	ext. cabinet	885 / 990 m3/h	
	int. cabinet	860 / 900 m3/h	
Cooling gas		R134a	
Max pressure		2,4 MPa	[348 psi]
Temperature range: setting 35°C [95 F]	ext. cabinet	20 ÷ 55 °C	[68 ÷ 131 F]
	int. cabinet	20 ÷ 50 °C	[68 ÷ 122 F]
Noise level		67 dB(A)	
Weight		50 kg	[110,2 lb]
Continuous duty		100%	
Protection standard	ext. Cabinet	IP 34	
	int. cabinet	IP 55	
Standard colour	Embossed	RAL 7035	
Power connection		Connector	
Dimensions Recessed / Semi-recessed and External mounting	W x H x D	495x1640x162 mm	[19,49x64,57x6,38 in]
Installation environment		Indoor	


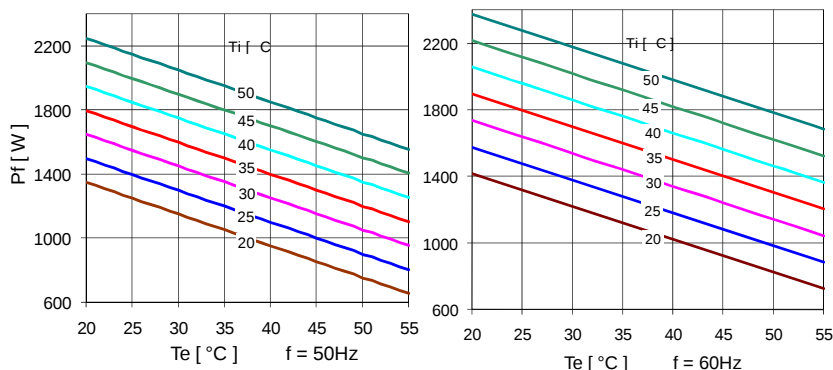


WALL MOUNTED MODEL

1500 W



TEMPLATE FOR RECESSED / SEMI-RECESSED AND EXTERNAL MOUNTING

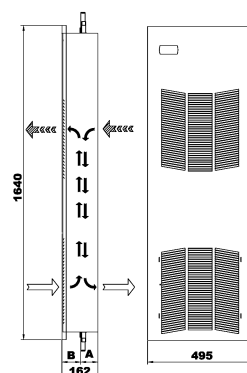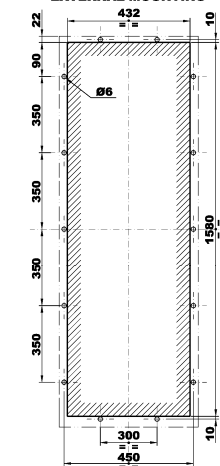

Version =	O	S	I
A(Inside enclosure) =	29 mm	81	141
B(Outside enclosure) =	133 mm	81	21



- Quick mounting.
- Totally external mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Version (V)	Compliance	Certification on demand
MKP (11-27) 17T*\$	7	CE	cURus
MKP (11-27) 17P*\$	7	CE	cURus
MKP (11-27) 17C*\$	7	CE	cURus

FOR THECNICAL DATA SEE DATA SHEETS OF DIFFERENT MODEL.

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.


(\$*) E = Total External mounting.

(*) H = not cURus certified

(*) U = cURus certified


Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

EXTERNAL MOUNTING - E -

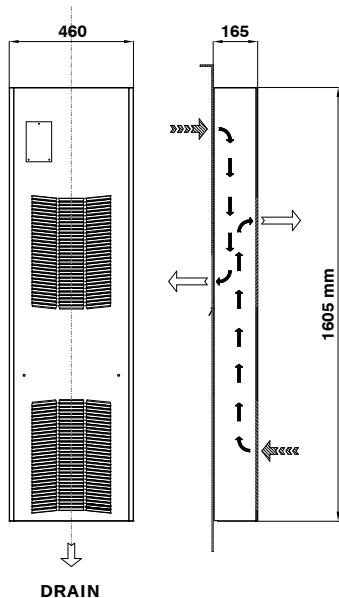

RECESSED MOUNTING

- O - Outside
- S - Semi
- I - Inside

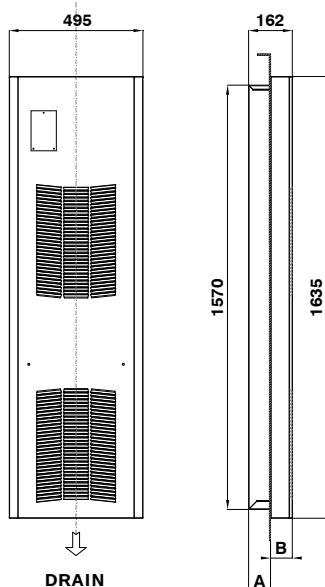


Version =	O	S	I
A (INside enclosure)	29	81	141
B (OUTside enclosure)	133	81	21

WALL MOUNTED MODEL

TOTAL EXTERNAL



CUT-OUT FOR EXTERNAL MOUNTING - E -

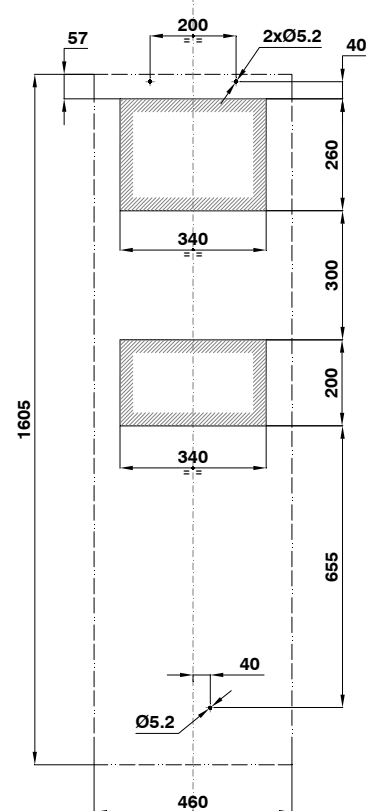

1 mm = 0.03937 "
1 " = 25.4 mm

- Quick mounting.
- Semi-recessed and recessed mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Voltage Frequency	Version (V)	Compliance	Certification on demand
MKP1517T*\$	1~ 230V 50/60Hz	7	CE	cURus
MKP1517P*\$	1~ 115V 50/60Hz	7	CE	cURus

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.

(\$) I = Recessed mounting

(\$) S = Semi-recessed mounting.

(\$) O = External mounting.


(*) H = not cURus certified

(*) U = cURus certified

Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

Operating voltage ±10%	Voltage	I rated 50/60 Hz	I start-up 50/60 Hz	Protection fuse	MCA
	1~ 230V	4,4/5,1 A	16,7/19,2 A	T12 A	6,8 A
	1~ 115V	8,8/10,2 A	33,4/38,4 A	T20 A	13,6 A

Technical data		Frequency 50/60 Hz	
Cooling power	A35-A35	1,5 / 1,6 kW	[5118 / 5459 Btu/h]
	A50-A35	1,2 / 1,3 kW	[4094 / 4435 Btu/h]
Absorbed electrical power	A35-A35	0,83 / 0,95 Kw	
	A50-A35	0,95 / 1,1 kW	
Energy efficiency EER	A35-A35	1,9 / 1,8	
Fan flow rate	ext. cabinet	885 / 990 m3/h	
	int. cabinet	860 / 900 m3/h	
Cooling gas		R134a	
Max pressure		2,4 MPa	[348 psi]
Temperature range: setting 35°C [95 F]	ext. cabinet	20 ÷ 55 °C	[68 ÷ 131 F]
	int. cabinet	20 ÷ 50 °C	[68 ÷ 122 F]
Noise level		69 dB(A)	
Weight		49 kg	[108 lb]
Continuous duty		100%	
Protection standard	ext. Cabinet	IP 34	
	int. cabinet	IP 55	
Standard colour	Embossed	RAL 7035	
Power connection		Connector	
Dimensions Recessed / Semi-recessed and External mounting	W x H x D	495x1640x162 mm	[19,49x64,57x6,38 in]
Installation environment		Indoor	


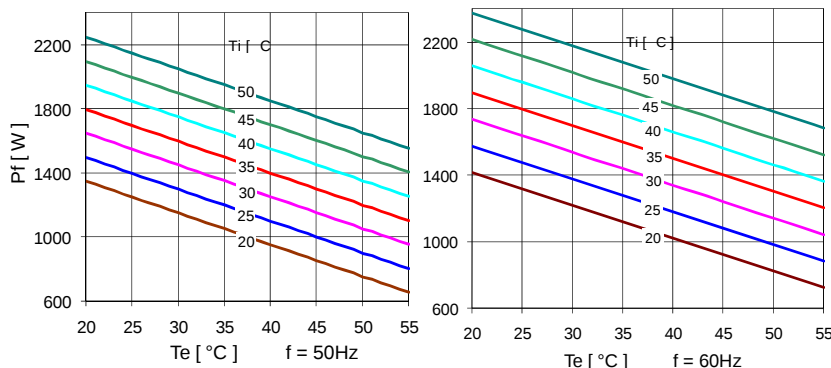


WALL MOUNTED MODEL

1500 W



TEMPLATE FOR RECESSED / SEMI-RECESSED AND EXTERNAL MOUNTING

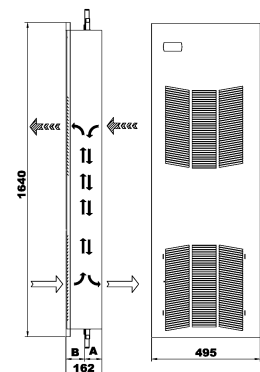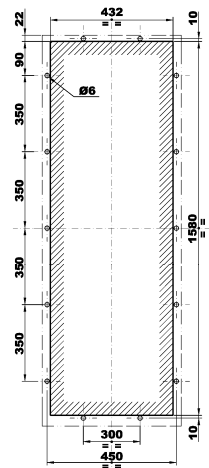

Version =	O	S	I
A(Inside enclosure) =	29 mm	81	141
B(Outside enclosure) =	133 mm	81	21



- Quick mounting.
- Semi-recessed and recessed mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.


Models	Voltage Frequency	Version (V)	Compliance	Certification on demand
MKP1517C*\$	3~ 400V 50Hz 3~ 460V 60Hz	7	CE	cURus

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.
 (V) 7 = Electronic thermostat + alarm signal + door open checking device.
 (\$) I = Recessed mounting.
 (\$) S = Semi-recessed mounting.
 (\$) O = External mounting.
 (*) H = not cURus certified
 (*) U = cURus certified

Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

Operating voltage ±10%	Voltage	I rated	I start-up	Protection fuse	MCA
	3~ 400V 50Hz	2,4 A	7,2 A	T8 A	
	3~ 460V 60Hz	3,0 A	9,0 A	T8 A	4,2 A

Technical data		Frequency 50/60 Hz	
Cooling power	A35-A35	1,5 / 1,6 kW	[5118 / 5459 Btu/h]
	A50-A35	1,2 / 1,3 kW	[4094 / 4435 Btu/h]
Absorbed electrical power	A35-A35	1,3 / 1,5 kW	
	A50-A35	1,5 / 1,8 kW	
Energy efficiency EER	A35-A35	1,2 / 1,1	
Fan flow rate	ext. cabinet	885 / 990 m3/h	
	int. cabinet	860 / 900 m3/h	
Cooling gas		R134a	
Max pressure		2,4 MPa	[348 psi]
Temperature range: setting 35°C [95 F]	ext. cabinet	20 ÷ 55 °C	[68 ÷ 131 F]
	int. cabinet	20 ÷ 50 °C	[68 ÷ 122 F]
Noise level		67 dB(A)	
Weight		50 kg	[110,2 lb]
Continuous duty		100%	
Protection standard	ext. Cabinet	IP 34	
	int. cabinet	IP 55	
Standard colour	Embossed	RAL 7035	
Power connection		Connector	
Dimensions Recessed / Semi-recessed and External mounting	W x H x D	495x1640x162 mm	[19,49x64,57x6,38 in]
Installation environment		Indoor	


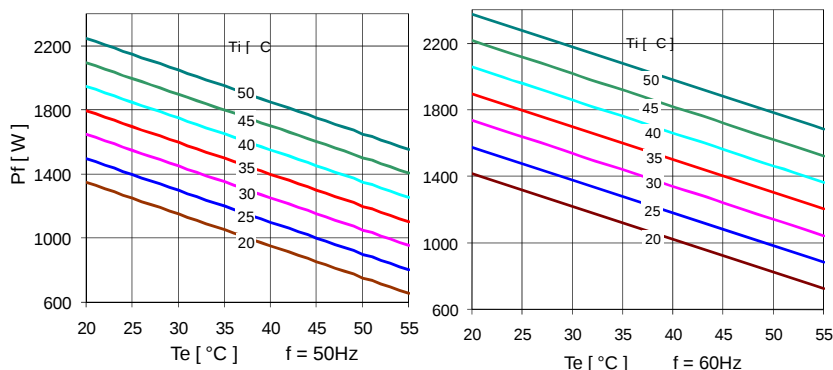


WALL MOUNTED MODEL

1500 W



TEMPLATE FOR RECESSED / SEMI-RECESSED AND EXTERNAL MOUNTING

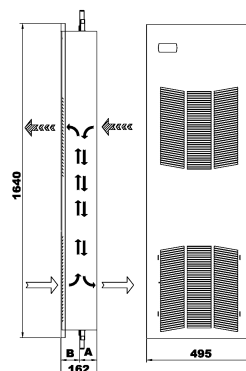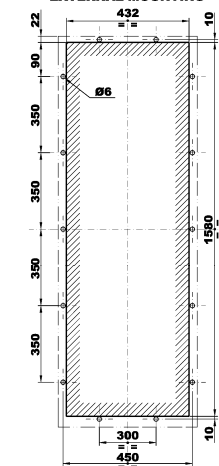

Version =	O	S	I
A(Inside enclosure) =	29 mm	81	141
B(Outside enclosure) =	133 mm	81	21



- Quick mounting.
- Semi-recessed and recessed mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Voltage Frequency	Version (V)	Compliance	Certification on demand
MKP1517T*\$	1~ 230V 50/60Hz	7	CE	cURus
MKP1517P*\$	1~ 115V 50/60Hz	7	CE	cURus

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.

(\$) I = Recessed mounting

(\$) S = Semi-recessed mounting.

(\$) O = External mounting.


(*) H = not cURus certified

(*) U = cURus certified

Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

Operating voltage ±10%	Voltage	I rated 50/60 Hz	I start-up 50/60 Hz	Protection fuse	MCA
	1~ 230V	4,4/5,1 A	16,7/19,2 A	T12 A	6,8 A
	1~ 115V	8,8/10,2 A	33,4/38,4 A	T20 A	13,6 A

Technical data		Frequency 50/60 Hz	
Cooling power	A35-A35	1,5 / 1,6 kW	[5118 / 5459 Btu/h]
	A50-A35	1,2 / 1,3 kW	[4094 / 4435 Btu/h]
Absorbed electrical power	A35-A35	0,83 / 0,95 Kw	
	A50-A35	0,95 / 1,1 kW	
Energy efficiency EER	A35-A35	1,9 / 1,8	
Fan flow rate	ext. cabinet	885 / 990 m3/h	
	int. cabinet	860 / 900 m3/h	
Cooling gas		R134a	
Max pressure		2,4 MPa	[348 psi]
Temperature range: setting 35°C [95 F]	ext. cabinet	20 ÷ 55 °C	[68 ÷ 131 F]
	int. cabinet	20 ÷ 50 °C	[68 ÷ 122 F]
Noise level		69 dB(A)	
Weight		49 kg	[108 lb]
Continuous duty		100%	
Protection standard	ext. Cabinet	IP 34	
	int. cabinet	IP 55	
Standard colour	Embossed	RAL 7035	
Power connection		Connector	
Dimensions Recessed / Semi-recessed and External mounting	W x H x D	495x1640x162 mm	[19,49x64,57x6,38 in]
Installation environment		Indoor	


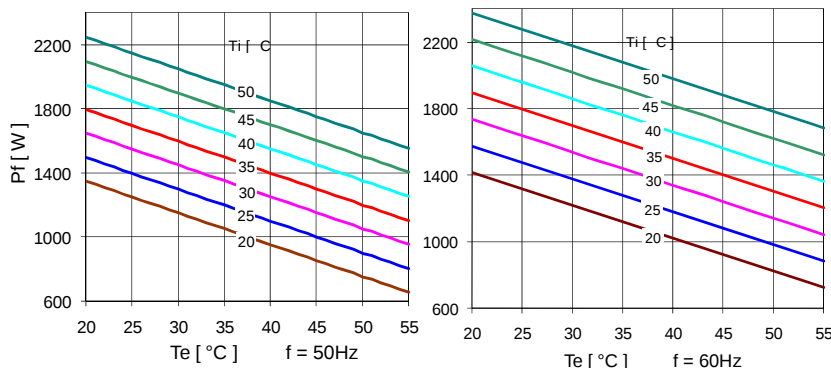


WALL MOUNTED MODEL

1500 W



TEMPLATE FOR RECESSED / SEMI-RECESSED AND EXTERNAL MOUNTING

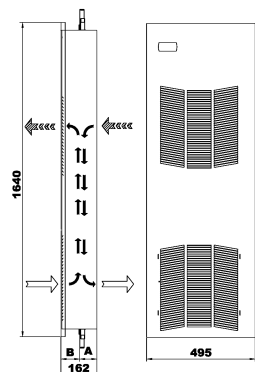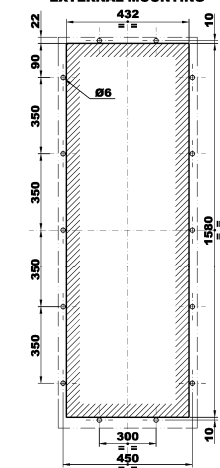

Version =	O	S	I
A(Inside enclosure) =	29 mm	81	141
B(Outside enclosure) =	133 mm	81	21



- Quick mounting.
- Totally external mounting.
- No condensation.
- Quick and simple maintenance.

- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Version (V)	Compliance	Certification on demand
MKP (11-27) 17T*\$	7	CE	cURus
MKP (11-27) 17P*\$	7	CE	cURus
MKP (11-27) 17C*\$	7	CE	cURus

FOR THECNICAL DATA SEE DATA SHEETS OF DIFFERENT MODEL.

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.


(\$ E = Total External mounting.

(*) H = not cURus certified

(*) U = cURus certified


Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

EXTERNAL MOUNTING - E -

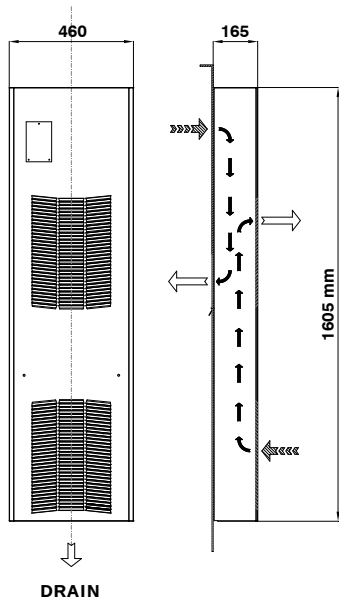

RECESSED MOUNTING

- O - Outside
- S - Semi
- I - Inside

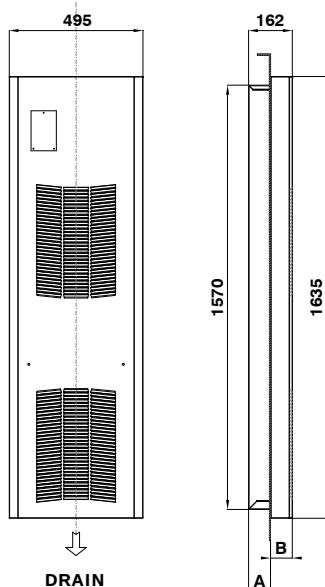


Version =	O	S	I
A (INside enclosure)	29	81	141
B (OUTside enclosure)	133	81	21

WALL MOUNTED MODEL

TOTAL EXTERNAL



CUT-OUT FOR EXTERNAL MOUNTING - E -

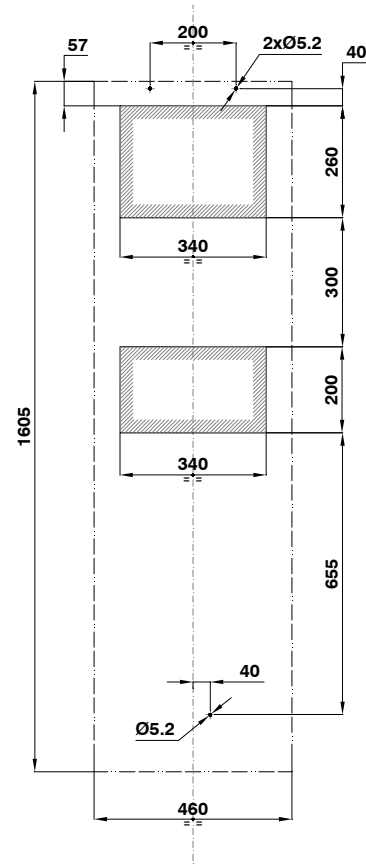

1 mm = 0.03937 "
1 " = 25.4 mm

- Quick mounting.
- Semi-recessed and recessed mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Voltage Frequency	Version (V)	Compliance	Certification on demand
MKP1117C*\$	3~ 400V 50 Hz 3~ 460V 60 Hz	7	CE	cURus

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.

(\$ I = Recessed mounting

(\$ S = Semi-recessed mounting.

(\$ O = External mounting.


(*) H = not cURus certified

(*) U = cURus certified

Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

Operating voltage ±10%	Voltage	I rated	I start-up	Protection	MCA
	3~ 400V 50 Hz	2,3 A	6,9 A	T8 A	
	3~ 460V 60 Hz	2,9 A	8,5 A	T8 A	4 A

Technical data		Frequency 50/60 Hz	
Cooling power	A35-A35	1,1 / 1,2 kW	[3754 / 4095 Btu/h]
	A50-A35	0,85 / 0,9 Kw	[2900 / 3071 Btu/h]
Absorbed electrical power	A35-A35	1,2 / 1,4 kW	
	A50-A35	1,4 / 1,7 kW	
Energy efficiency EER	A35-A35	0,9 / 0,8	
Fan flow rate	ext. cabinet	860 / 900 m3/h	
	int. cabinet	570 / 620 m3/h	
Cooling gas		R134a	
Max pressure		2,4 MPa	[348 psi]
Temperature range: setting 35°C [95 F]	ext. cabinet	20 ÷ 55 °C	[68 ÷ 131 F]
	int. cabinet	20 ÷ 50 °C	[68 ÷ 122 F]
Noise level		67 dB(A)	
Weight		50 kg	[110,2 lb]
Continuous duty		100%	
Protection standard	ext. Cabinet	IP 34	
	int. cabinet	IP 55	
Standard colour	Embossed	RAL 7035	
Power connection		Connector	
Dimensions Recessed / Semi-recessed and External mounting	W x H x D	495x1640x162 mm	[19,49x64,57x6,38 in]
Installation environment		Indoor	


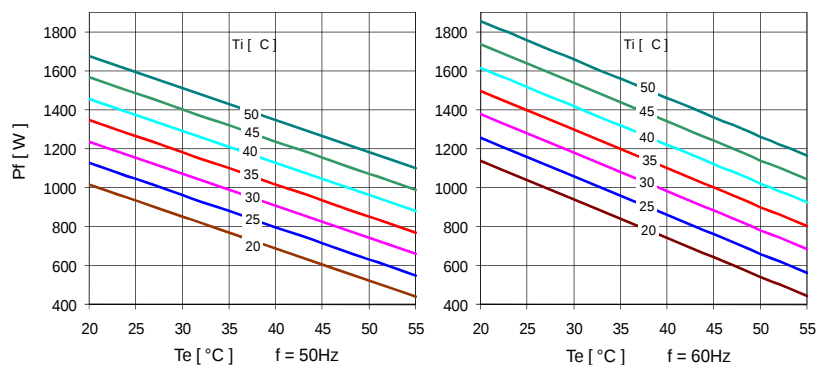


WALL MOUNTED MODEL

1100 W



TEMPLATE FOR RECESSED / SEMI-RECESSED AND EXTERNAL MOUNTING

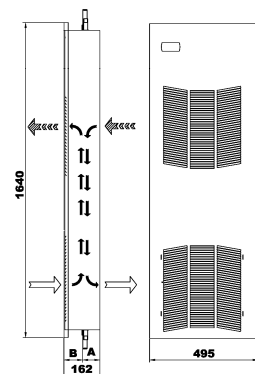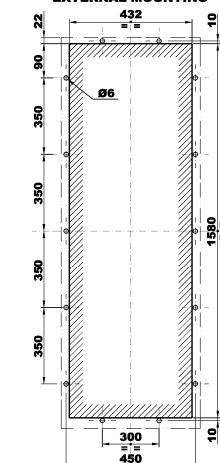

Version =	O	S	I
A(Inside enclosure) =	29 mm	81	141
B(Outside enclosure) =	133 mm	81	21



- Quick mounting.
- Totally external mounting.
- No condensation.
- Quick and simple maintenance.

- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Version (V)	Compliance	Certification on demand
MKP (11-27) 17T*\$	7	CE	cURus
MKP (11-27) 17P*\$	7	CE	cURus
MKP (11-27) 17C*\$	7	CE	cURus

FOR THECNICAL DATA SEE DATA SHEETS OF DIFFERENT MODEL.

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.


(\$ E = Total External mounting.

(*) H = not cURus certified

(*) U = cURus certified


Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

EXTERNAL MOUNTING - E -

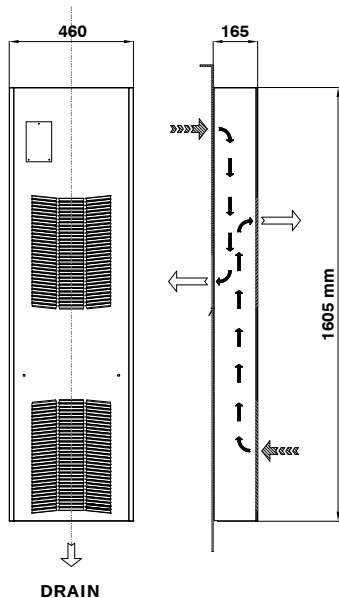

RECESSED MOUNTING

- O - Outside
- S - Semi
- I - Inside

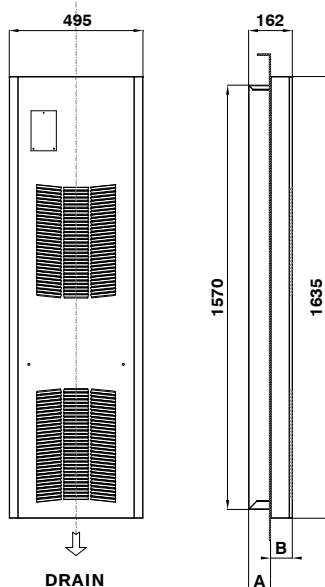


Version =	O	S	I
A (INside enclosure)	29	81	141
B (OUTside enclosure)	133	81	21

WALL MOUNTED MODEL

TOTAL EXTERNAL



CUT-OUT FOR EXTERNAL MOUNTING - E -

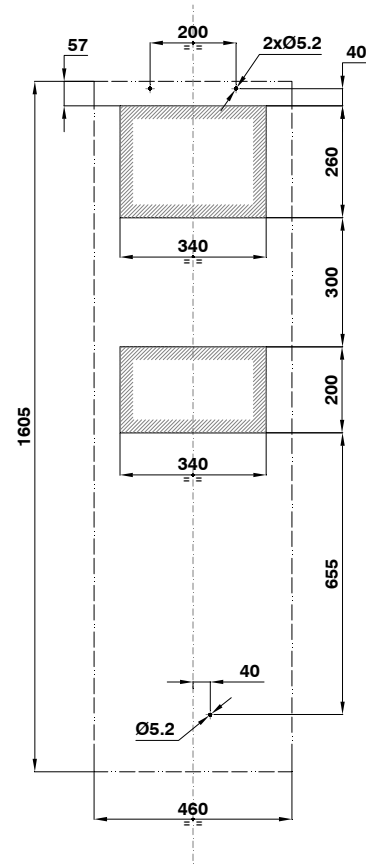

1 mm = 0.03937 "
1 " = 25.4 mm

- Quick mounting.
- Semi-recessed and recessed mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Voltage Frequency	Version (V)	Compliance	Certification on demand
MKP1117T*\$	1~ 230V 50/60Hz	7	CE	cURus
MKP1117P*\$	1~ 115V 50/60Hz	7	CE	cURus

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.

(\$) I = Recessed mounting

(\$) S = Semi-recessed mounting.

(\$) O = External mounting.


(*) H = not cURus certified

(*) U = cURus certified

Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

Operating voltage ±10%	Voltage	I rated 50/60 Hz	I start-up 50/60 Hz	Protection fuse	MCA
	1~ 230V	2,9/3,5 A	11/13,5 A	T8 A	4,8 A
	1~ 115V	5,8/7 A	22/27 A	T16 A	9,6 A

Technical data		Frequency 50/60 Hz	
Cooling power	A35-A35	1,1 / 1,2 kW	[3754 / 4095 Btu/h]
	A50-A35	0,85 / 0,9 kW	[2900 / 3071 Btu/h]
Absorbed electrical power	A35-A35	0,6 / 0,71 kW	
	A50-A35	0,71 / 0,85 kW	
Energy efficiency EER	A35-A35	1,8 / 1,7	
Fan flow rate	ext. cabinet	860 / 900 m3/h	
	int. cabinet	570 / 620 m3/h	
Cooling gas		R134a	
Max pressure		2,4 MPa	[348 psi]
Temperature range: setting 35°C [95 F]	ext. cabinet	20 ÷ 55 °C	[68 ÷ 131 F]
	int. cabinet	20 ÷ 50 °C	[68 ÷ 122 F]
Noise level		67 dB(A)	
Weight		46 kg	[101,4 lb]
Continuous duty		100%	
Protection standard	ext. Cabinet	IP 34	
	int. cabinet	IP 55	
Standard colour	Embossed	RAL 7035	
Power connection		Connector	
Dimensions Recessed / Semi-recessed and External mounting	W x H x D	495x1640x162 mm	[19,49x64,57x6,38 in]
Installation environment		Indoor	


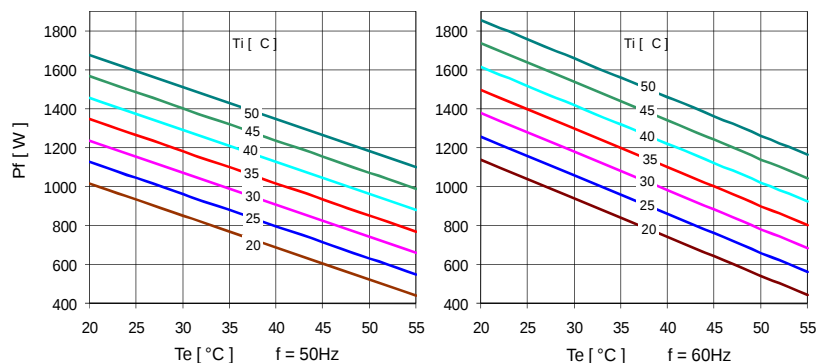


WALL MOUNTED MODEL

1100 W



TEMPLATE FOR RECESSED / SEMI-RECESSED AND EXTERNAL MOUNTING

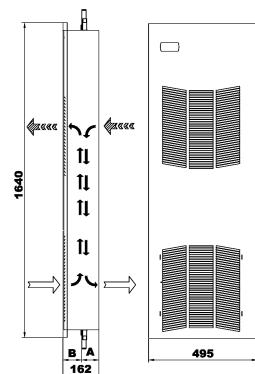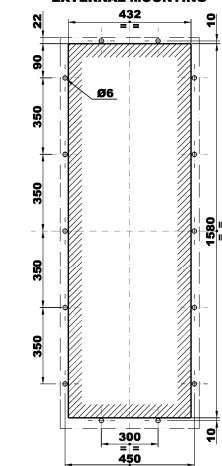

Version =	O	S	I
A(Inside enclosure) =	29 mm	81	141
B(Outside enclosure) =	133 mm	81	21



- Quick mounting.
- Semi-recessed and recessed mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Voltage Frequency	Version (V)	Compliance	Certification on demand
MKP1117C*\$	3~ 400V 50 Hz 3~ 460V 60 Hz	7	CE	cURus

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.

(\$ I = Recessed mounting

(\$ S = Semi-recessed mounting.

(\$ O = External mounting.


(*) H = not cURus certified

(*) U = cURus certified

Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

Operating voltage ±10%	Voltage	I rated	I start-up	Protection	MCA
	3~ 400V 50 Hz	2,3 A	6,9 A	T8 A	
	3~ 460V 60 Hz	2,9 A	8,5 A	T8 A	4 A

Technical data		Frequency 50/60 Hz	
Cooling power	A35-A35	1,1 / 1,2 kW	[3754 / 4095 Btu/h]
	A50-A35	0,85 / 0,9 Kw	[2900 / 3071 Btu/h]
Absorbed electrical power	A35-A35	1,2 / 1,4 kW	
	A50-A35	1,4 / 1,7 kW	
Energy efficiency EER	A35-A35	0,9 / 0,8	
Fan flow rate	ext. cabinet	860 / 900 m3/h	
	int. cabinet	570 / 620 m3/h	
Cooling gas		R134a	
Max pressure		2,4 MPa	[348 psi]
Temperature range: setting 35°C [95 F]	ext. cabinet	20 ÷ 55 °C	[68 ÷ 131 F]
	int. cabinet	20 ÷ 50 °C	[68 ÷ 122 F]
Noise level		67 dB(A)	
Weight		50 kg	[110,2 lb]
Continuous duty		100%	
Protection standard	ext. Cabinet	IP 34	
	int. cabinet	IP 55	
Standard colour	Embossed	RAL 7035	
Power connection		Connector	
Dimensions Recessed / Semi-recessed and External mounting	W x H x D	495x1640x162 mm	[19,49x64,57x6,38 in]
Installation environment		Indoor	


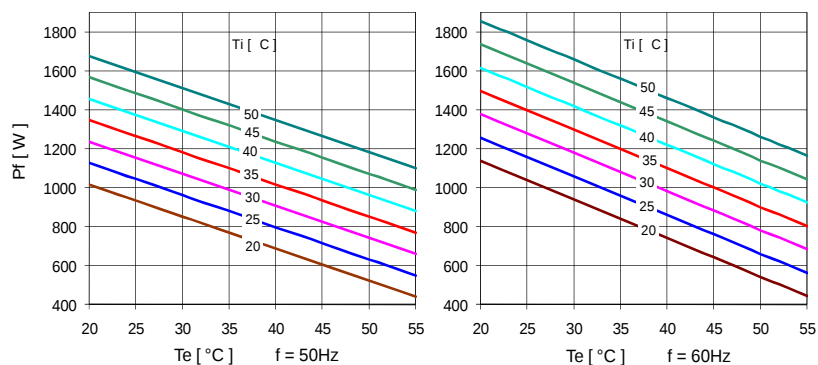


WALL MOUNTED MODEL

1100 W



TEMPLATE FOR RECESSED / SEMI-RECESSED AND EXTERNAL MOUNTING

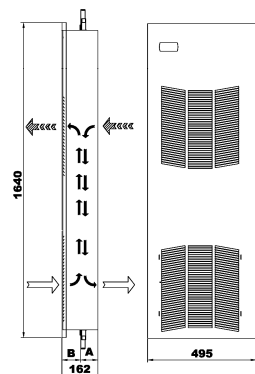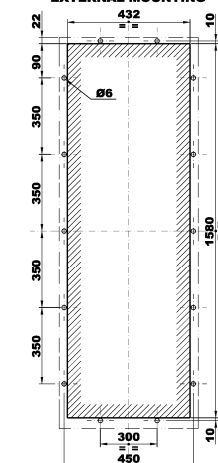

Version =	O	S	I
A(Inside enclosure) =	29 mm	81	141
B(Outside enclosure) =	133 mm	81	21



- Quick mounting.
- Semi-recessed and recessed mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Voltage Frequency	Version (V)	Compliance	Certification on demand
MKP1117T*\$	1~ 230V 50/60Hz	7	CE	cURus
MKP1117P*\$	1~ 115V 50/60Hz	7	CE	cURus

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.

(\$) I = Recessed mounting

(\$) S = Semi-recessed mounting.

(\$) O = External mounting.


(*) H = not cURus certified

(*) U = cURus certified

Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

Operating voltage ±10%	Voltage	I rated 50/60 Hz	I start-up 50/60 Hz	Protection fuse	MCA
	1~ 230V	2,9/3,5 A	11/13,5 A	T8 A	4,8 A
	1~ 115V	5,8/7 A	22/27 A	T16 A	9,6 A

Technical data		Frequency 50/60 Hz	
Cooling power	A35-A35	1,1 / 1,2 kW	[3754 / 4095 Btu/h]
	A50-A35	0,85 / 0,9 kW	[2900 / 3071 Btu/h]
Absorbed electrical power	A35-A35	0,6 / 0,71 kW	
	A50-A35	0,71 / 0,85 kW	
Energy efficiency EER	A35-A35	1,8 / 1,7	
Fan flow rate	ext. cabinet	860 / 900 m3/h	
	int. cabinet	570 / 620 m3/h	
Cooling gas		R134a	
Max pressure		2,4 MPa	[348 psi]
Temperature range: setting 35°C [95 F]	ext. cabinet	20 ÷ 55 °C	[68 ÷ 131 F]
	int. cabinet	20 ÷ 50 °C	[68 ÷ 122 F]
Noise level		67 dB(A)	
Weight		46 kg	[101,4 lb]
Continuous duty		100%	
Protection standard	ext. Cabinet	IP 34	
	int. cabinet	IP 55	
Standard colour	Embossed	RAL 7035	
Power connection		Connector	
Dimensions Recessed / Semi-recessed and External mounting	W x H x D	495x1640x162 mm	[19,49x64,57x6,38 in]
Installation environment		Indoor	


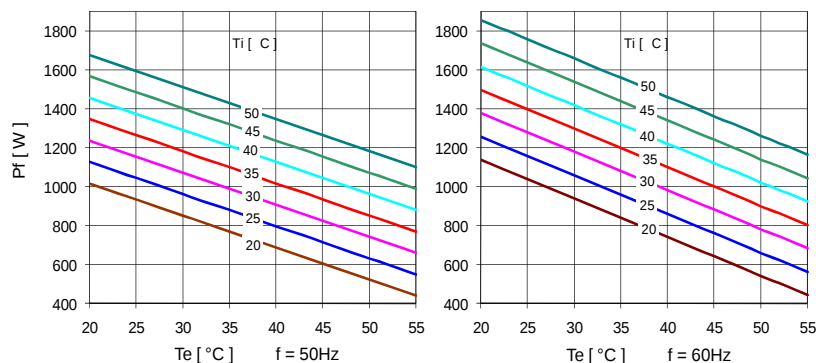


WALL MOUNTED MODEL

1100 W



TEMPLATE FOR RECESSED / SEMI-RECESSED AND EXTERNAL MOUNTING

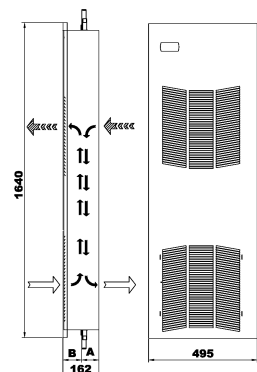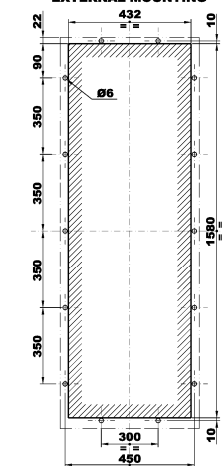

Version =	O	S	I
A(Inside enclosure) =	29 mm	81	141
B(Outside enclosure) =	133 mm	81	21



- Quick mounting.
- Totally external mounting.
- No condensation.
- Quick and simple maintenance.

- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Version (V)	Compliance	Certification on demand
MKP (11-27) 17T*\$	7	CE	cURus
MKP (11-27) 17P*\$	7	CE	cURus
MKP (11-27) 17C*\$	7	CE	cURus

FOR THECNICAL DATA SEE DATA SHEETS OF DIFFERENT MODEL.

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.

(V) 7 = Electronic thermostat + alarm signal + door open checking device.


(\$ E = Total External mounting.

(*) H = not cURus certified

(*) U = cURus certified


Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

EXTERNAL MOUNTING - E -

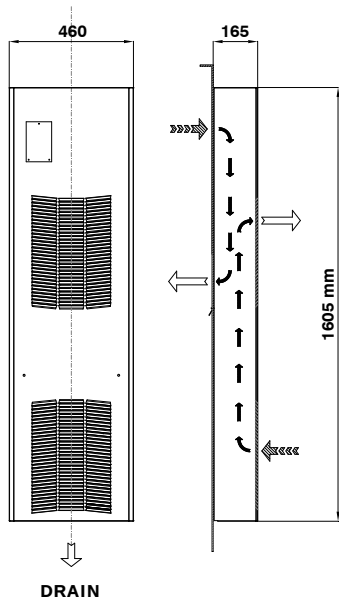

RECESSED MOUNTING

- O - Outside
- S - Semi
- I - Inside

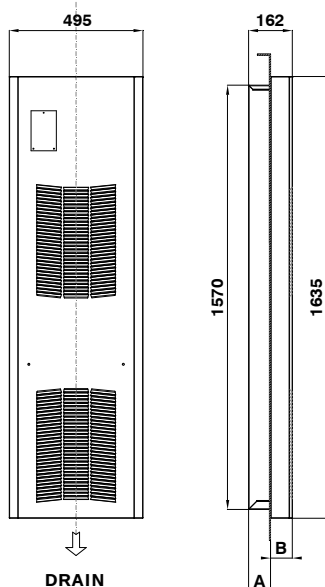


Version =	O	S	I
A (INside enclosure)	29	81	141
B (OUTside enclosure)	133	81	21

WALL MOUNTED MODEL

TOTAL EXTERNAL



CUT-OUT FOR EXTERNAL MOUNTING - E -

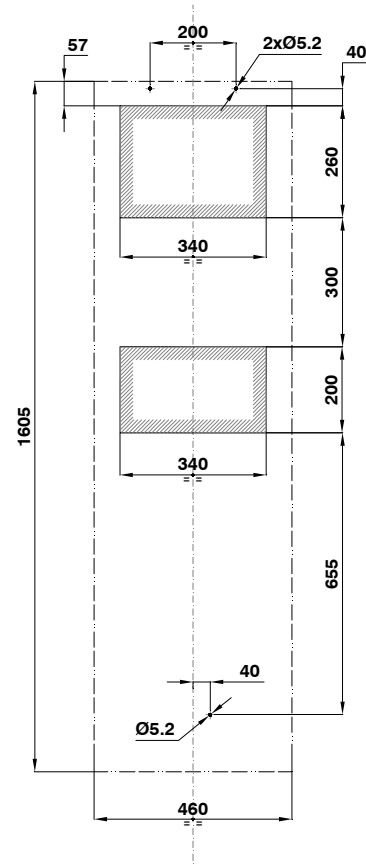

1 mm = 0.03937 "
1 " = 25.4 mm

- Quick mounting.
- Semi-recessed and recessed mounting.
- No condensation.
- Quick and simple maintenance.
- Designed for working with no filter.
- Filter is optional for severe environments.
- ALUZINC structure: rust free for more than 600 hours in saline fog.

Models	Voltage Frequency	Version (V)	Compliance	Certification on demand
MKP2717C*\$	3~ 400V 50 Hz 3~ 460V 60 Hz	7	CE	cURus

On demand: Different voltage; Stainless steel(AISI304) cover; Special painting.
V) 7 = Electronic thermostat + alarm signal + door open checking device.

(\$) I = Recessed mounting

(\$) S = Semi-recessed mounting.

(\$) O = External mounting.



(*) H = not cURus certified

(*) U = cURus certified

Available accessories	Filter kit / Spare filter set	See reference sheet
	Kit Display	
	Dissipator of condensation	
	Kit Remote Control	

Operating voltage ±10%	Voltage	I rated	I start-up	Protection	MCA
	3~ 400V 50 Hz	3 A	9 A	T8 A	
	3~ 460V 60 Hz	3,5 A	10,6 A	T8 A	4,8 A

Technical data		Frequency 50/60 Hz	
Cooling power	A35-A35	2,7 / 2,9 kW	[9213 / 9895 Btu/h]
	A50-A35	2,2 / 2,4 kW	[7507 / 8189 Btu/h]
Absorbed electrical power	A35-A35	1,7 / 2,0 kW	
	A50-A35	2,0 / 2,3 kW	
Energy efficiency EER	A35-A35	1,6 / 1,5	
Fan flow rate	ext. cabinet	1200 / 1340 m3/h	
	int. cabinet	885 / 990 m3/h	
Cooling gas		R134a	
Max pressure		2,4 MPa	[348 psi]
Temperature range: setting 35°C [95 F]	ext. cabinet	20 ÷ 55 °C	[68 ÷ 131 F]
	int. cabinet	20 ÷ 50 °C	[68 ÷ 122 F]
Noise level		69 dB(A)	
Weight		60 kg	[132,2 lb]
Continuous duty		100%	
Protection standard	ext. Cabinet	IP 34	
	int. cabinet	IP 55	
Standard colour	Embossed	RAL 7035	
Power connection		Connector	
Dimensions Recessed / Semi-recessed and External mounting	W x H x D	495x1640x162 mm	[19,49x64,57x6,38 in]
Installation environment		Indoor	

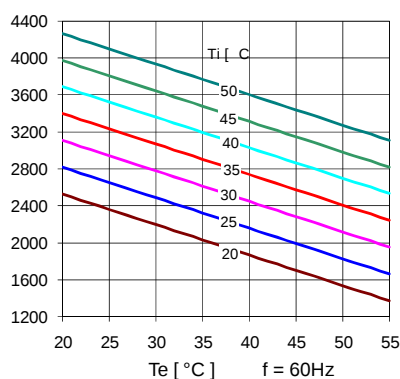
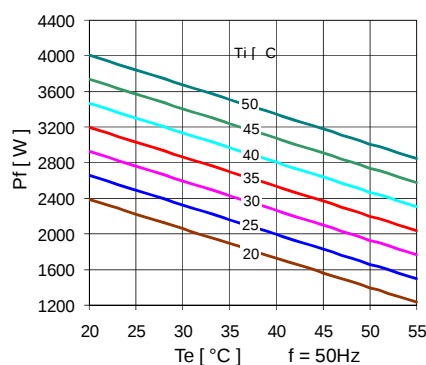


WALL MOUNTED MODEL

2700 W



TEMPLATE FOR RECESSED / SEMI-RECESSED AND EXTERNAL MOUNTING

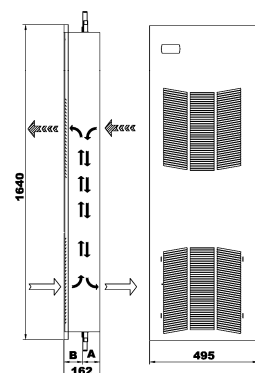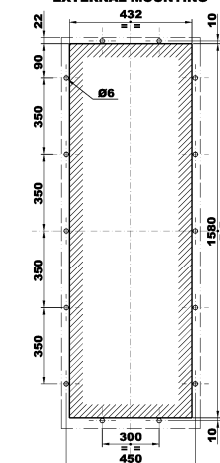

Version =	O	S	I
A(Inside enclosure) =	29 mm	81	141
B(Outside enclosure) =	133 mm	81	21

